

## KG-UV 950P 2 Radio repeater (same band)



How to connect 2 wouxun uv-950p to create a same band repeater.

Obviously, you will need 2 radios, and ideally a cavity duplexer, but it will work with 2 antennas and for test I have used 2 dummy loads and set the frequency 6mhz apart

Manual Page 48



You need the cable that is supplied in the box




It plugs in the PC port under the rubber cover on both radios.



You should now have something that looks like this.

# KG-UV 950P 2 Radio repeater (same band)

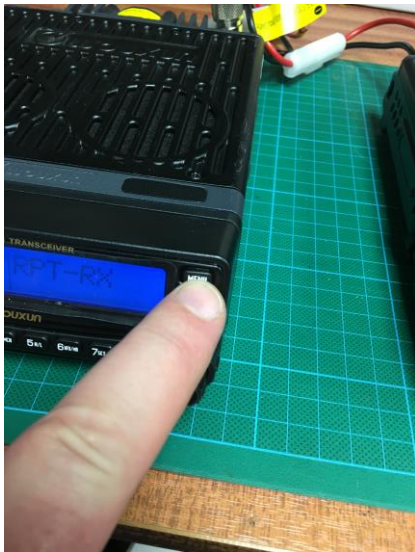

Press menu and scroll to menu 32.



RPT-SET

T-W-RPT



Set 1 radio RPT-RX

Set 1 radio T-W-RPT



## KG-UV 950P 2 Radio repeater (same band)



Set your frequency with desired split, the receive radio RPT-RX will listen for a transmission and relay it to the other radio for transmission via the connection cable.

You can see here the radio RX and TX ... you can set tones as per the manual.